


WASHABLE FILTER

MATERIAL AND OPERATION CONDITIONS

- Efficiency 35% to 45%
- Increased filter media area
- Low initial resistance.
- High dust holding capacity
- Metal frame
- Protective mesh on the filter media
- Maximum moisture resistance: 100%.
- Washable (recommended no more than twice).

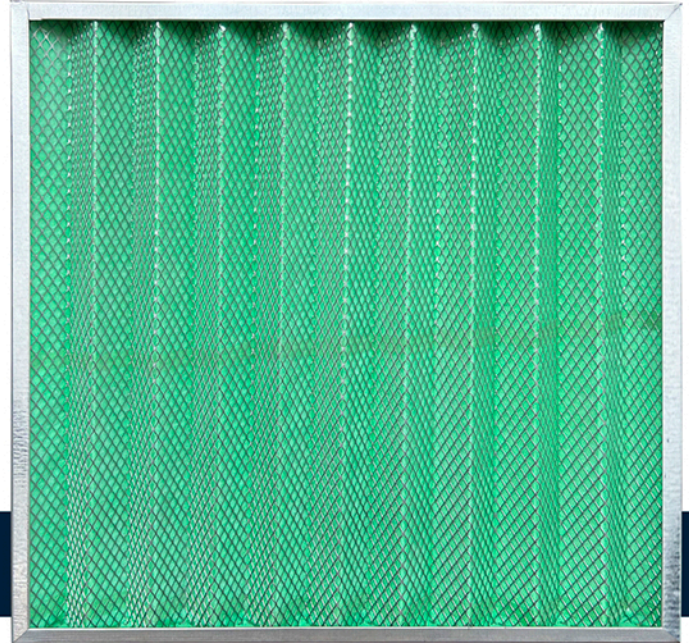

PRODUCT FEATURES

- Heat and fire resistance (flame retardant)
- Frame made of stainless steel or galvanized steel.
- Excellent performance throughout its service life.
- Washable air filter constructed with high-quality synthetic polyester fiber.

APPLICATIONS

Used in central air conditioning units and integrated air supply systems.

TECHNOLOGY PARAMETERS

Size (in) (AxBxP)	Size (mm) (AxBxP)	AirFlow (CFM)	Initial Res (In. W.G)	Final Res (In. W.G)	Media Area (m ²)
24 X 24 X 2	592 X 592 X 46	1.920	0.2	0.6 - 1	0.82
12 X 24 X 2	287 X 592 X 46	936	0.2	0.6 - 1	0.44
20 X 24 X 2	490 X 592 X 46	1.596	0.2	0.6 - 1	0.70
24 X 24 X 4	592 X 592 X 96	1.920	0.2	0.6 - 1	1.26
12 X 24 X 4	287 X 592 X 96	936	0.2	0.6 - 1	0.63
20 X 24 X 4	490 X 592 X 96	1.860	0.2	0.6 - 1	1.13